


- High grade stainless steel
- Load rating up to 65kg
- 75% extension
- 9.5mm slide thickness
- Hold-in
- Ideal for environments where mild steel might be subject to corrosion

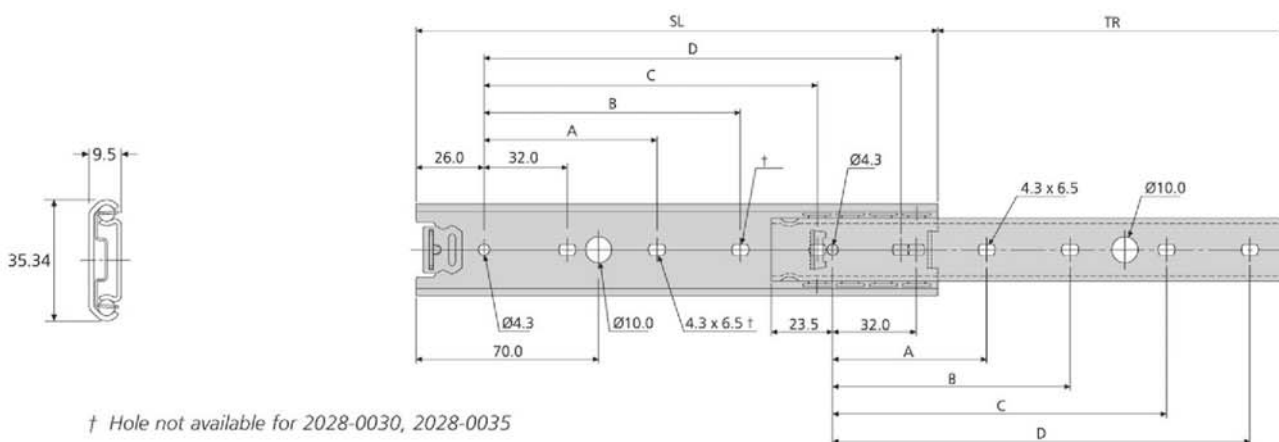

| DS2028 | mm | | | | | | kg | |
|-------------|-----|-----|-----|-----|-----|-----|------|----|
| | SL | TR | A | B | C | D | W | L |
| DS2028-0030 | 300 | 209 | 96 | 128 | 224 | 256 | 0.54 | 65 |
| DS2028-0035 | 350 | 245 | 96 | 128 | 256 | 288 | 0.62 | 63 |
| DS2028-0040 | 400 | 282 | 160 | 192 | 320 | 352 | 0.70 | 59 |
| DS2028-0045 | 450 | 320 | 160 | 192 | 384 | 416 | 0.80 | 57 |
| DS2028-0050 | 500 | 357 | 192 | 224 | 416 | 448 | 0.88 | 53 |
| DS2028-0055 | 550 | 394 | 192 | 224 | 480 | 512 | 0.96 | 50 |
| DS2028-0060 | 600 | 432 | 224 | 256 | 512 | 544 | 1.02 | 46 |
| DS2028-0065 | 650 | 469 | 224 | 256 | 576 | 608 | 1.14 | 43 |
| DS2028-0070 | 700 | 506 | 256 | 288 | 608 | 640 | 1.22 | 42 |


Notes:

- Fixing recommendation: M4 screw

Telescopic Slides 57

- High grade stainless steel
- Load rating up to 65kg
- 100% extension
- 19.1mm slide thickness
- Hold-in
- Ideal for environments where mild steel might be subject to corrosion

80,000

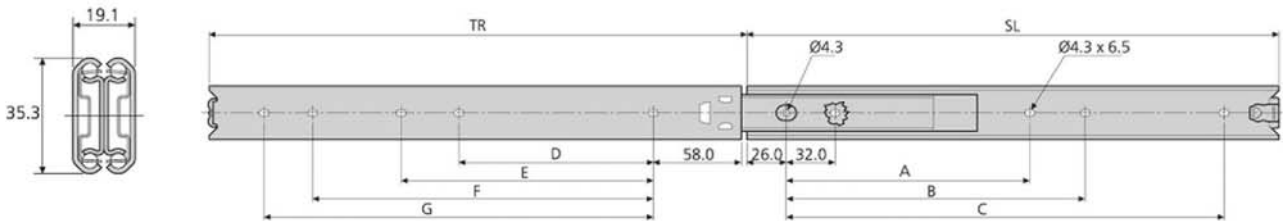

| DS0330 | mm | | | | | | | | | kg | |
|-------------|-----|-------|-----|-----|-----|-----|-----|-----|-----|------|----|
| | SL | TR | A | B | C | D | E | F | G | W | L |
| DS0330-0030 | 300 | 304.5 | - | 192 | 224 | - | - | 192 | 224 | 1.15 | 50 |
| DS0330-0035 | 350 | 354.0 | - | 224 | 256 | - | - | 224 | 256 | 1.36 | 55 |
| DS0330-0040 | 400 | 403.0 | - | 192 | 320 | 160 | - | 288 | 320 | 1.46 | 55 |
| DS0330-0045 | 450 | 452.0 | - | 224 | 352 | 192 | - | 320 | 352 | 1.66 | 65 |
| DS0330-0050 | 500 | 501.0 | 256 | 288 | 416 | 224 | 256 | 384 | 416 | 1.88 | 55 |
| DS0330-0055 | 550 | 550.5 | 288 | 320 | 480 | 256 | 288 | 416 | 448 | 2.06 | 50 |
| DS0330-0060 | 600 | 600.0 | 320 | 352 | 512 | 288 | 320 | 480 | 512 | 2.27 | 45 |
| DS0330-0070 | 700 | 698.0 | 352 | 384 | 608 | 320 | 352 | 576 | 608 | 2.70 | 35 |

Notes:

- Fixing recommendation: M4 screw